


FOUR CHANNEL SUPERHETERODYNE SET

PRODUCT CODE: U4HSL

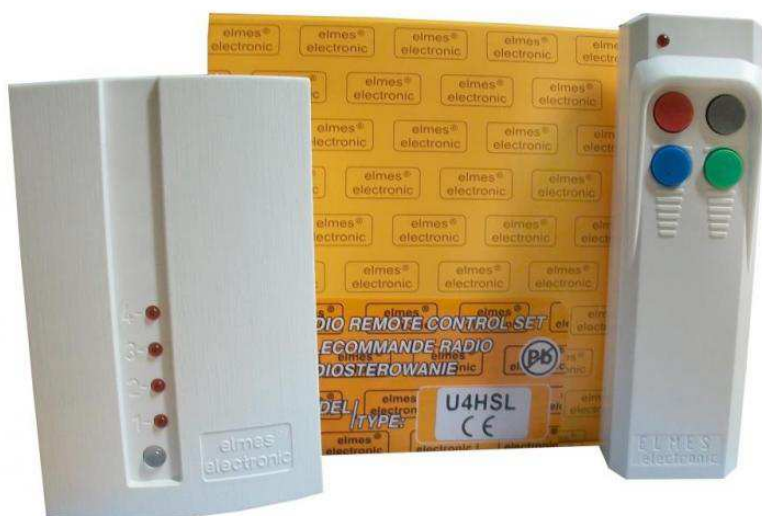

Basic operation modes to be selected by user

- ON/OFF (bistable output mode)
- automatic OFF after programmed time (monostable output mode timing: from 0,25s up to 4 hrs)
- mini alarm control panel

Technical specification

- dynamic code system *KEELOQ[®]* of Microchip Corp. USA
- operating frequency: 433,92 MHz
- receiver's memory capacity: 112
- receiver's power supply: 12 VDC
- transmitter's power supply: battery 9V
- approximate range in open field: 200m
- output relay ratings: 60VA (128VAC/1A) each
- number of channels/relay outputs: 4
- superheterodyne receiver module with sensitivity: -105 dBm,
- current consumption: 20mA plus 40mA on relays set
- operating temperature range from -20 to + 40 °C,
- signal output S (1A/60V max.) OC type,
- sabotage alarm terminals NC type (at box closed)
- external dimensions: (L/W/D) 96/63/28mm.

Manufacturer: ELMES ELEKTRONIK, 54-611 Wrocław, Avicenny 2, Poland

Manufacturer's Limited Warranty: 2 years